


Rail Mounted Terminal Blocks : Polyamide Range Of Terminals : Feed Through Terminal : KUT 35



Type of Connection	MS Screw Clamp
Insulating Material	Polyamide 66
Terminal Pitch	17 mm (0.66 Inch)
Terminal Width	51 mm (1.99 Inch)
Terminal Height	58 mm (2.26 Inch)
Rated Cross Section	35 sq mm
Wire Stripping Length	17 mm
Screw Size	M6

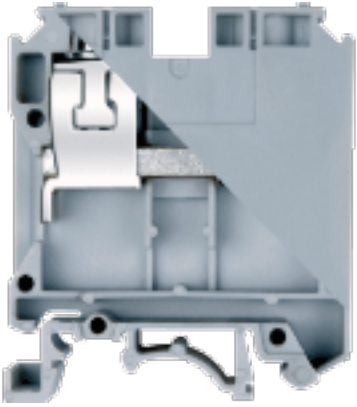

Connection Possibility

Stranded wire	Max : 35 sq mm	Min : 10 sq mm
Solid wire	Max : 35 sq mm	Min : 10 sq mm

Ratings	IEC	UL
Voltage	1000 V	600 V
Current	125 A	130 A
Conductor Size	35 sq mm	Min : 14 AWG Max : 1 AWG
Tightening Torque	3 Nm	38 Lbln

Terminal Accessories

Partition Plate With Foot	KBZF
Protection Cover	PCK3
End Clamp	SCUN, SCUSL, SCUDD, SCKN, DCKN
Cross Connection Link Assembly	CCLA35K - 2W
Link for Removable Shorting	RSL35K
Long Stud For Removable Shorting	LSR35K
Marking Label	LABEL KN17
Warning Label	WARNING LABEL WL35
Group Marking Carrier	SCKNMLH, SCUNMLH, DCKNMLH
Terminal Colours	GREY, KHAKHI, RED, YELLOW, BLUE, BLACK, GREEN
Mounting Channel	CHS10, CHK10, CHS3, CHS5, CHK5, CHK3, CHKS3, CHKS5, CHKS10, CHKDS10, CHKD10