



## DUTKD2.5WS

Terminal Type - DUTKD2.5WS, Knife Disconnect Terminal Block , nominal voltage: 1000 V, nominal current: 24 A, connection method: Screw connection with spring support , number of connections: 2, Rated cross section: 2.5 mm<sup>2</sup> , cross section: 0.5 mm<sup>2</sup> - 4 mm<sup>2</sup> , mounting type: TS 35/7.5, TS 35/15 , TS 32



### Approvals



### General Information

Product Name	DUTKD2.5WS
Connection Method	Screw Connection with spring support
Rating	1000 V / 24 A / 2.5 mm <sup>2</sup> / 0.4 Nm
HSN Number	85389000
Standard Packing Qty (in No)	100
Country Of Origin	India
Screw thread	M2.6

### Dimensions & Weight

Width	5 mm	0.2 inch
Length	62 mm	2.44 inch
Height	53.5 mm	2.11 inch
Weight of std. Packing Unit	1.2 Kg	

### Material Data

Insulating Material	Polyamide 6,6
Standard Colour	Gray
Colour Variants	Red, Yellow, Blue, Black, Green, Khakhi

### Rated Conductor Size

Conductor cross section flexible min	0.5 mm <sup>2</sup>
Conductor cross section flexible max	2.5 mm <sup>2</sup>
Conductor cross section solid min	0.5 mm <sup>2</sup>
Conductor cross section solid max	4 mm <sup>2</sup>

### Rated Conductor Size

Conductor cross section flexible min	0.5 mm <sup>2</sup>
Conductor cross section flexible max	2.5 mm <sup>2</sup>

Conductor cross section solid min	0.5 mm <sup>2</sup>
Conductor cross section solid max	4 mm <sup>2</sup>

**Product Accessories**


**Cover Profile**

PCK3	Height : 28.00 mm Width : 58.35 mm Thickness : 1.00 mm	
------	--	---



**Cover Profile Carrier**

UHDD	Height : 74.50 mm Thickness : 2.00 mm Length : 55.82 mm	
------	---	---

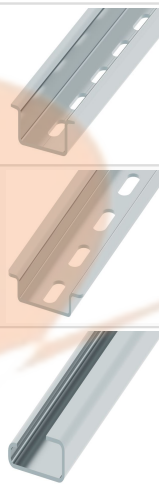**DIN Rail Perforated**

CHKDS	Height : 15.00 mm Width : 35.00 mm Thickness : 1.50 mm Length : 2,000.00 mm	
CHKS	Height : 7.50 mm Width : 35.00 mm Thickness : 1.00 mm	
CHS	Height : 15.00 mm Width : 32.00 mm Thickness : 1.50 mm	

**DIN Rail, Unperforated**

CHKD	Height : 15.00 mm Width : 35.00 mm Thickness : 1.50 mm	
CHK	Height : 7.50 mm Width : 35.00 mm Thickness : 1.00 mm	








**End Cap**


CHKENDCAP	Height : 14.00 mm Width : 9.00 mm Length : 41.50 mm	
-----------	---	---

**End Clamp**

SCUP	Height : 34.00 mm Width : 9.00 mm Length : 44.75 mm	
------	---	---

<b>End Clamp</b>		
SCEC35	Height : 31.50 mm Width : 8.00 mm Length : 45.80 mm	
SCUSL	Height : 41.10 mm Width : 8.00 mm Length : 47.50 mm	
SCUDD	Height : 50.00 mm Width : 10.00 mm Length : 55.60 mm	
DCKN	Height : 33.00 mm Width : 6.00 mm Length : 43.50 mm	
DCKN10	Height : 35.00 mm Width : 10.00 mm Length : 43.50 mm	
SCKN	Height : 34.50 mm Width : 8.00 mm Length : 44.90 mm	
SCUN	Height : 35.50 mm Width : 9.50 mm Length : 50.60 mm	
<b>End Cover</b>		
DUTKD4EP	Height : 38.20 mm Width : 1.50 mm Length : 62.00 mm	
<b>Marker For Terminal Blocks</b>		
LABEL KN5	Height : 2.42 mm Width : 5.00 mm Length : 7.50 mm	
<b>Partition Plate</b>		
KBZF	Height : 65.00 mm Width : 1.50 mm Length : 65.00 mm	

Plug-in Bridge/Jumper		
SLPU5-2W	Height : 26.00 mm Width : 3.00 mm Pitch : 5.00 mm Length : 9.15 mm	
SLPU5-3W	Height : 26.00 mm Width : 3.00 mm Pitch : 5.00 mm Length : 14.15 mm	
SLPU5-10W	Height : 26.00 mm Width : 3.00 mm Pitch : 5.00 mm Length : 49.15 mm	
SLPU5-4W	Height : 26.00 mm Width : 3.00 mm Pitch : 5.00 mm Length : 19.15 mm	
SLPU5-5W	Height : 26.00 mm Width : 3.00 mm Pitch : 5.00 mm Length : 24.15 mm	
SLPU5-6W	Height : 26.00 mm Width : 3.00 mm Pitch : 5.00 mm Length : 29.15 mm	
SLPU5-7W	Height : 26.00 mm Width : 3.00 mm Pitch : 5.00 mm Length : 34.15 mm	

Marker carriers		
GMH10	Height : 51.00 mm Width : 10.00 mm Length : 42.25 mm	
GMH20	Height : 51.00 mm Width : 20.00 mm Length : 42.25 mm	