



KUDD4CC2

Terminal Type - KUDD4CC2 , Component Housings terminal block, nominal voltage: 500 V, Diode : 1N 4007 , Common Cathode , Diode current: 1 A , Rated cross-section - 2.5 mm², connection method: Screw connection, number of connections: 3, cross-section: 0.5 mm² - 2.5 mm², mounting type: TS 35/7.5, TS 35/15 , TS 32



Approvals



General Information

Product Name	KUDD4CC2
Connection Method	Screw Connection
Rating	500 V / Diode Current - 1 A / 2.5 mm ² / 0.4 Nm
HSN Number	8904476705020
Standard Packing Qty (in No)	100
Country Of Origin	India
Screw thread	M3

Dimensions & Weight

Width	6 mm	0.24 inch
Length	54 mm	2.13 inch
Height	59.7 mm	2.35 inch
Weight of std. Packing Unit	1.45 Kg	

Material Data

Insulating Material	Polyamide 6,6
Standard Colour	Gray
Colour Variants	Red, Yellow, Blue, Black, Green, Khakhi, Gray

Rated Conductor Size

Conductor cross section flexible min	0.5 mm ²
Conductor cross section flexible max	2.5 mm ²
Conductor cross section solid min	0.5 mm ²
Conductor cross section solid max	4 mm ²

Rated Conductor Size

Conductor cross section flexible min	0.5 mm ²
Conductor cross section flexible max	2.5 mm ²

Conductor cross section solid min	0.5 mm ²
Conductor cross section solid max	4 mm ²

Product Accessories


Cover Profile

PCK3	Height : 28.00 mm Width : 58.35 mm Thickness : 1.00 mm	
------	--	---



Cover Profile Carrier

UHDD	Height : 74.50 mm Width : 2.00 mm Length : 55.82 mm	
------	---	---

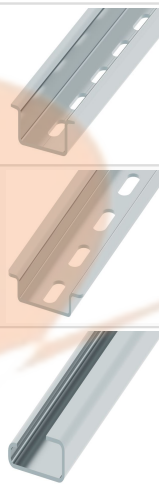DIN Rail Perforated

CHKDS	Height : 15.00 mm Width : 35.00 mm Thickness : 1.50 mm Length : 2,000.00 mm	
CHKS	Height : 7.50 mm Width : 35.00 mm Thickness : 1.00 mm	
CHS	Height : 15.00 mm Width : 32.00 mm Thickness : 1.50 mm	


DIN Rail, Unperforated

CHKD	Height : 15.00 mm Width : 35.00 mm Thickness : 1.50 mm	
CHK	Height : 7.50 mm Width : 35.00 mm Thickness : 1.00 mm	

End Cap

CHKENDCAP	Height : 14.00 mm Width : 9.00 mm Length : 41.50 mm	
-----------	---	---

End Clamp

SCUP	Height : 34.00 mm Width : 9.00 mm Length : 44.75 mm	
------	---	---

End Clamp		
SCEC35	Height : 31.50 mm Width : 8.00 mm Length : 45.80 mm	
SCUSL	Height : 41.10 mm Width : 8.00 mm Length : 47.50 mm	
SCUDD	Height : 50.00 mm Width : 10.00 mm Length : 55.60 mm	
DCKN	Height : 33.00 mm Width : 6.00 mm Length : 43.50 mm	
DCKN10	Height : 35.00 mm Width : 10.00 mm Length : 43.50 mm	
SCKN	Height : 34.50 mm Width : 8.00 mm Length : 44.90 mm	
SCUN	Height : 35.50 mm Width : 9.50 mm Length : 50.60 mm	
End Cover		
KPDD	Height : 100.00 mm Width : 5.00 mm Length : 108.00 mm	
Fixed Bridge		
CCLADD-10W	Height : 16.50 mm Width : 5.40 mm Pitch : 6.00 mm Length : 59.30 mm	
CCLADD-2W	Height : 16.50 mm Width : 5.40 mm Pitch : 6.00 mm Length : 11.30 mm	
CCLADD-3W	Height : 16.50 mm Width : 5.40 mm Pitch : 6.00 mm Length : 17.30 mm	

Fixed Bridge		
CCLADD-4W	Height : 16.50 mm Width : 5.40 mm Pitch : 6.00 mm Length : 23.30 mm	
CCLADD-5W	Height : 16.50 mm Width : 5.40 mm Pitch : 6.00 mm Length : 29.30 mm	
CCLADD-6W	Height : 16.50 mm Width : 5.40 mm Pitch : 6.00 mm Length : 35.30 mm	
CCLADD-7W	Height : 16.50 mm Width : 5.40 mm Pitch : 6.00 mm Length : 41.30 mm	
CCLADD-8W	Height : 16.50 mm Width : 5.40 mm Pitch : 6.00 mm Length : 47.30 mm	
Insertion Bridge		
SLC4N-3W	Height : 23.00 mm Width : 3.00 mm Pitch : 6.00 mm Length : 16.65 mm	
SLC4N-4W	Height : 23.00 mm Width : 3.00 mm Pitch : 6.00 mm Length : 22.65 mm	
SLC4N-5W	Height : 23.00 mm Width : 3.00 mm Pitch : 6.00 mm Length : 28.65 mm	
SLC4N-6W	Height : 23.00 mm Width : 3.00 mm Pitch : 6.00 mm Length : 34.65 mm	
SLC4N-10W	Height : 23.00 mm Width : 3.00 mm Pitch : 6.00 mm Length : 58.60 mm	
SLC4N-2W	Height : 23.00 mm Width : 3.00 mm Pitch : 6.00 mm Length : 10.91 mm	

Marker For Terminal Blocks		
LABEL KN5.5	Height : 2.42 mm Width : 6.00 mm Length : 7.50 mm	

Marker carriers		
SCUDDMLH	Height : 71.50 mm Width : 11.00 mm Length : 55.60 mm	
SCUNMLH	Height : 53.50 mm Width : 11.00 mm Length : 50.60 mm	
DCKNMLH	Height : 45.00 mm Width : 10.00 mm Length : 43.50 mm	
SCKNMLH	Height : 42.00 mm Width : 16.00 mm Length : 44.70 mm	

