



LPT225

Terminal Type - LPT225 , Feed-through terminal block, nominal voltage: 400 V, nominal current: 101 A, connection method: Screw connection, Operated by - 3mm / 4 mm Allen key , number of connections: 3 , cross section: 4 mm² - 25 mm² , mounting type: TS 35/7.5, TS 35/15 , TS 32



Approvals



General Information

Product Name	LPT225
Connection Method	Screw Connection
Rating	400 V / 101 A / IC - 25 mm ² , OG - 4 mm ² / NAV Nm
HSN Number	85389000
Standard Packing Qty (in No)	10
Country Of Origin	India
Screw thread	NA

Dimensions & Weight

Width	10.8 mm	0.43 inch
Length	42 mm	1.65 inch
Height	43.6 mm	1.72 inch
Weight of std. Packing Unit	0.48 Kg	

Material Data

Insulating Material	Polyamide 6,6
Standard Colour	Gray
Colour Variants	-

Rated Conductor Size

Conductor cross section flexible min	4 mm ²
Conductor cross section flexible max	25 mm ²
Conductor cross section solid min	4 mm ²
Conductor cross section solid max	25 mm ²

Rated Conductor Size

Conductor cross section flexible min	4 mm ²
Conductor cross section flexible max	25 mm ²

Conductor cross section solid min	4 mm ²
Conductor cross section solid max	25 mm ²

Product Accessories


Cover Profile

PCK3	Height : 28.00 mm Width : 58.35 mm Thickness : 1.00 mm	
------	--	---



Cover Profile Carrier

UHDD	Height : 74.50 mm Thickness : 2.00 mm Length : 55.82 mm	
------	---	---

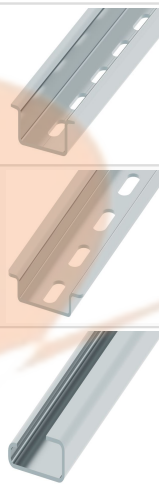DIN Rail Perforated

CHKDS	Height : 15.00 mm Width : 35.00 mm Thickness : 1.50 mm Length : 2,000.00 mm	
CHKS	Height : 7.50 mm Width : 35.00 mm Thickness : 1.00 mm	
CHS	Height : 15.00 mm Width : 32.00 mm Thickness : 1.50 mm	


DIN Rail, Unperforated

CHKD	Height : 15.00 mm Width : 35.00 mm Thickness : 1.50 mm	
CHK	Height : 7.50 mm Width : 35.00 mm Thickness : 1.00 mm	

End Cap

CHKENDCAP	Height : 14.00 mm Width : 9.00 mm Length : 41.50 mm	
-----------	---	---

Marker For Terminal Blocks

LABEL KN10	Height : 2.89 mm Width : 10.00 mm Length : 8.50 mm	
------------	--	---