


DPBB70CN

Terminal Type - DPBB70CN , High current connectors, nominal voltage: 1000 V, nominal current: 192 A, connection method: Bolt connection with clinch nut, number of connections: 2, Rated cross-section – 70 mm², cross section: 10 mm² - 70 mm² , Suitable for 95 mm², AWG: 6 - 2/0 mounting type: TS 35/7.5 , TS 35/15 , TS 32



Approvals

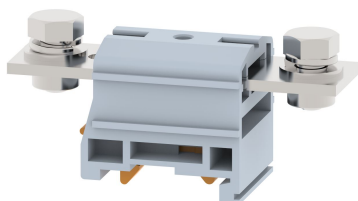

General Information

Product Name	DPBB70CN
Connection Method	Bolt Connection
Rating	1000 V/192 A/70 mm ² /3 Nm
HSN Number	85389000
Standard Packing Qty(in No)	10
Country Of Origin	India
Screw thread	M6

Dimensions & Weight

Width	37 mm	1.46 inch
Length	90 mm	3.54 inch
Height	44 mm	1.73 inch
Weight of std. Packing Unit	1.03 Kg	

Material Data

Insulating Material	Polyamide 6,6
Standard Colour	Gray
Colour Variants	Red , Yellow , Blue , Black , Green , Khakhi ,

Rated Conductor Size

Conductor cross section flexible min	10 mm ²
Conductor cross section flexible max	70 mm ²
Conductor cross section solid min	10 mm ²
Conductor cross section solid max	70 mm ²

Ratings - IEC

Connection in acc. with standard	IEC 60947-7-1
Nominal Voltage U_n	1000 V
Nominal Current I_n	192 A
Nominal cross section	70 mm ²
Short-time current	8.40 kA
Rated surge voltage	12 kV
Degree of pollution	3

