




CONNECTING TO THE FUTURE OF WIRE TERMINATION

Next Generation Terminals



elmex
ARA
Push-In Technology



elmex
AURIGA
Spring Clamp Technology



elmex
AQUILA
Screw Clamp Technology

www.elmex.net

INTRODUCING THE PERFECT ELECTRICAL CONNECTION

Wire termination plays an important role in the overall functioning of any electrical system. Also the user needs to manage a wide range of products and its accessories depending on the type of application.

'elmex' introduces a new range of Push-In type, Spring Clamp type and Screw Clamp type terminal blocks with robust design, manufactured for highest level of electrical and mechanical performance, across a wide of range of applications. These range of products are also a good choice for designers in optimizing the inventory of terminal blocks as well as accessories.

KEY ADVANTAGES

Common accessories such as jumpers, end plates and marking labels facilitate low inventory

Improved wire entry with or without lugs


Provision for interconnection between terminal blocks with different functions

Possibility of interconnection between terminal blocks having different rated conductor sizes

Uniform design with harmonized features across all the three series

Wider marking labels for better visibility

Compact in design for better space utilization

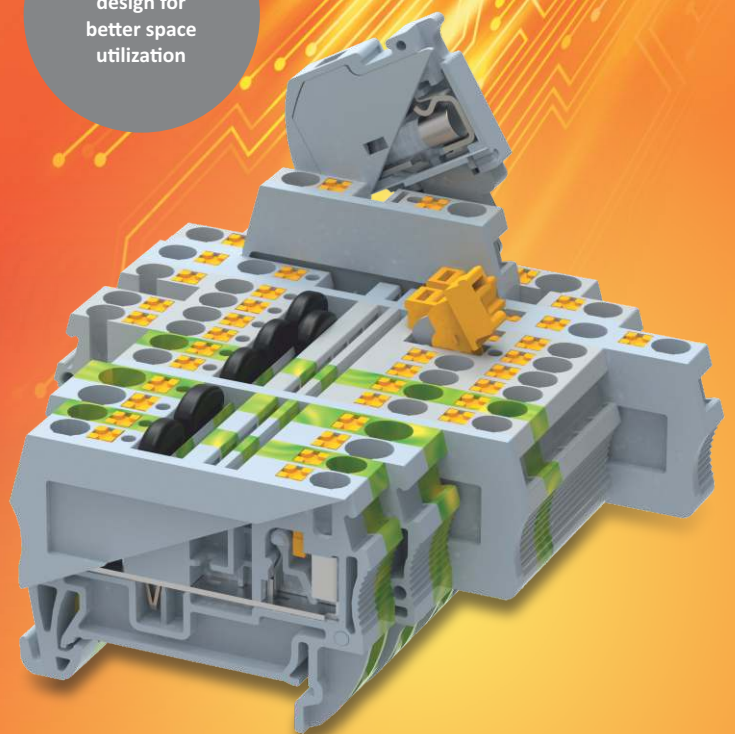

INDEX

PRODUCT	PAGE NUMBER
ARA (Push-In Technology)	
FEED THROUGH TERMINALS	
PQ1.5	6
PQ2.5	6
PQ4	6
PQ6	6
PQ10	6
PQ16	6
MULTI-LEVEL TERMINALS	
PQ2.5-2T	6
PQ2.5-3T	6
PQ4-2T	6
MULTI CONDUCTOR TERMINALS	
PQ2.5-1X2	6
PQ2.5-2X2	6
PQ4-1X2	6
PQ4-2X2	6
PQ6-1X2	6
PQ6-2X2	6
EARTH TERMINALS	
PGQ1.5	6
PGQ2.5	7
PGQ4	7
PGQ6	7
PGQ10	7
EARTH MULTI LEVEL TERMINALS	
PGQ2.5-2T	7
PGQ2.5-3T	7
EARTH MULTI CONDUCTOR TERMINALS	
PGQ2.5-1X2	7
PGQ2.5-2X2	7
PGQ4-1X2	7
PGQ4-2X2	7
PGQ6-1X2	7
DISCONNECT TERMINALS	
PQK2.5	7
PQK4	7
DISCONNECT MULTI CONDUCTOR TERMINALS	
PQK2.5-1X2	7
PQK2.5-2X2	7
SLIDING DISCONNECT TERMINALS	
PQD6	7
FUSE TERMINALS	
PQF4	8
PQF4-LED	8
MULTI LEVEL FUSE TERMINALS	
PQF4-2T	8
PCB CONNECTOR	
PQT2.5	8
PUSH-IN RELAY TERMINAL UNITS	
Electromechanical Relay - 1 Changeover	9
Solid State Relay	9

PRODUCT	PAGE NUMBER
AURIGA (Spring Clamp Technology)	
FEED THROUGH TERMINALS	
SQ2.5	11
SQ4	11
SQ6	11
SQ10	11
SQ16	11
MULTI LEVEL TERMINALS	
SQ2.5-2T	11
SQ2.5-2T+IS	11
SQ2.5-3T	11
SQ4-2T	11
MULTI CONDUCTOR TERMINALS	
SQ2.5-1X2	11
SQ2.5-2X2	11
SQ4-1X2	11
SQ4-2X2	11
SQ6-1X2	11
SQ10-1X2	11
SQ16-1X2	11
EARTH TERMINALS	
SGQ2.5	12
SGQ4	12
SGQ6	12
SGQ10	12
SGQ16	12
EARTH MULTI LEVEL TERMINALS	
SGQ2.5-2T	12
SGQ2.5-3T	12
SGQ4-2T	12
EARTH MULTI CONDUCTOR TERMINALS	
SGQ2.5-1X2	12
SGQ2.5-2X2	12
SGQ4-1X2	12
SGQ4-2X2	12
SGQ6-1X2	12
SGQ10-1X2	12
SGQ16-1X2	12
DISCONNECT TERMINALS	
SQK2.5	13
SQK4	13
DISCONNECT MULTI CONDUCTOR TERMINALS	
SQK2.5-1X2	13
SQK2.5-2X2	13
FUSE TERMINALS	
SQF4	13
SQF4-LED	13
MICRO TERMINALS	
SQM2.5 (15 mm Rail Mounted)	13
SQP2.5 (Panel Mounted)	13
SQP2.5P4 (Panel Mounted)	13

INDEX

PRODUCT	PAGE NUMBER	PRODUCT	PAGE NUMBER
MICRO TERMINALS		DISCONNECT MULTI LEVEL TERMINALS	
SQTP2.5 (Panel Mounted)	13	TQK4-2T	16
SQTP2.5WPM (Panel Mounted)	13	TQK4-2T+E	16
SQTP2.5P4 (Panel Mounted)	13	DISCONNECT MULTI CONDUCTOR TERMINALS	
SQTP2.5P4WPM (Panel Mounted)	13	TQK2.5-1X2	17
PCB CONNECTORS		TQK2.5-2X2	17
SQECD	13	TQK4-1X2	17
SQECDD	13	TQK4-2X2	17
AQUILA (Screw Clamp Technology)		FUSE TERMINALS	
FEED THROUGH TERMINALS		TQF4	17
TQ2.5	15	TQF4-LED	17
TQ4	15	TQF6	17
TQ6	15	TQF6-LED	17
TQ10	15	FUSE MULTI LEVEL TERMINALS	
TQC16	15	TQF4-2T	17
TQC25	15	TQF4-2T-LED	17
MULTI LEVEL TERMINALS		TQF4-2T+E	17
TQ2.5-2T	15	STUD TYPE TERMINALS (SHROUDED)	
TQ2.5-2T+WOE	15	ONTM3-6C	17
TQ2.5-2T+E	15	ONTM4-10C	17
TQ2.5-3T	15	ONTM5-16C	17
TQ2.5-3T+WOE	15	TC SERIES	
TQ2.5-3T+E	15	FEED THROUGH TERMINALS	
TQ4-2T	15	TC2.5	18
MULTI CONDUCTOR TERMINALS		TC4	18
TQKFT2.5-1X2	15	TC6	18
TQKFT2.5-2X2	15	TC10	18
TQKFT4-1X2	15	EARTH TERMINALS	
TQKFT4-2X2	16	TGC2.5	18
EARTH TERMINALS		TGC4	18
TGQ2.5	16	TGC6	18
TGQ4	16	TGC10	18
TGQ6	16	ACCESSORIES	
TGQ10	16	MOUNTING CHANNELS	19
TGQC16	16	MARKING LABELS	19
EARTH MULTI LEVEL TERMINALS		PVC GROUP MARKING CARRIER	20
TGQ2.5-2T	16	END PLATES	20-21
TGQ2.5-3T	16	INTER CONNECTING ACCESSORIES	21
TGQ4-2T	16	BARRIER PLATES & PROTECTIVE COVERS	22
EARTH MULTI CONDUCTOR TERMINALS			
TGQ2.5-1X2	16		
TGQ2.5-2X2	16		
DISCONNECT TERMINALS			
TQK2.5	16		
TQK4	16		
TQK6	16		

elmex ARA

Push-In Technology

Named after one of the brightest constellations in the southern sky - "Ara" in Greek mythology represents an 'Altar', a raised structure where something of value is kept. This represents the next generation "Push-In" range as one of the best offerings in the market.

Tool free wiring

Increased wiring efficiency and productivity


Rated for 1000V

Twin shorting facility

Top marking label provision

Vibration resistant connection


Lever to release wire from terminal clamp

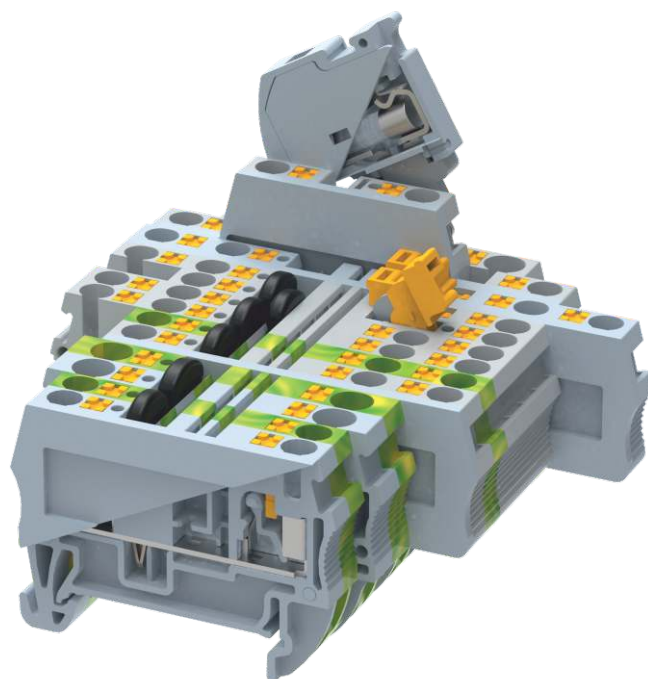


Solutions for a Range of Applications



**Feed Through
Terminals**




**Multiple Output
Terminals**




**Earth (Grounding)
Terminals**



**Multi level
Terminals**



**Disconnecting
Terminals**



**Fuse
Terminals**

Feed Through Terminals

PQ1.5



CE RU RU CB

IEC 60947-7-1: 1000 V / 17.5 A / 1.5 sq mm
 RU RU : 600 V / 15 A / 14-24 AWG
 H32(1.25"), W47.2(1.86"), T3.5(0.14")
 End Plate: CSP1.5
 Shorting Links: SLPU3.5-2W
 Marking Label: KN3.5

PQ2.5



CE RU RU CB

IEC 60947-7-1: 1000 V / 24 A / 2.5 sq mm
 RU RU : 600 V / 20 A / 12-24 AWG
 H36.9(1.45"), W50.7(2.00"), T5(0.20")
 End Plate: CSP2.5
 Shorting Links: SLPU5-2W
 Marking Label: KN5

PQ4



CE RU RU CB

IEC 60947-7-1: 1000 V / 32 A / 4 sq mm
 RU RU : 600 V / 30 A / 10-24 AWG
 H36.9(1.45"), W56.2(2.22"), T6(0.24")
 End Plate: CSP4
 Shorting Links: SLPU6-2W
 Marking Label: KN5.5

PQ6



CE RU RU CB

IEC 60947-7-1: 1000 V / 41 A / 6 sq mm
 RU RU : 600 V / 40 A / 8-24 AWG
 H43.8(1.70"), W64.2(2.52"), T8(0.32")
 End Plate: CSP6
 Shorting Links: SLPU8-2W
 Marking Label: KN8

Feed Through Terminals


PQ10



CE RU RU CB

IEC 60947-7-1: 1000 V / 57 A / 10 sq mm
 RU RU : 600 V / 60 A / 6-24 AWG
 H49.9(1.96"), W70.2(2.77"), T10(0.40")
 End Plate: CP10
 Shorting Links: SLPU10-2W
 Marking Label: KN10

PQ16



CE

IEC 60947-7-1: 1000 V / 76 A / 16 sq mm
 H52.3(2.06"), W79(3.12"), T12(0.47")
 End Plate: CP16
 Shorting Links: SLPU12-2W
 Marking Label: KN12

Multi Level Terminal

PQ2.5-2T



CE RU RU CB

IEC 60947-7-1: 1000 V / 24 A / 2.5 sq mm
 RU RU : 600 V / 20 A / 12-24 AWG
 H47.9(1.88"), W73.2(2.89"), T5(0.20")
 End Plate: CSP2.5-2T
 Shorting Links: SLPU5-2W
 Marking Label: KN5

PQ2.5-3T




CE

IEC 60947-7-1: 1000 V / 24 A / 2.5 sq mm
 H58.9(2.32"), W108(4.25"), T5(0.20")
 End Plate: CP2.5-3T
 Shorting Links: SLPU5-2W
 Marking Label: KN5

Multi Level Terminal

PQ4-2T



CE

IEC 60947-7-1: 1000 V / 28 A / 4 sq mm
 H50.4(1.98"), W99.3(3.88"), T6(0.24")
 End Plate: CP4-2T
 Shorting Links: SLPU6-2W
 Marking Label: KN5.5

PQ2.5-1X2



CE RU RU CB

IEC 60947-7-1: 1000 V / 24 A / 2.5 sq mm
 RU RU : 600 V / 20 A / 12-24 AWG
 H36.9(1.45"), W62.7(2.46"), T5(0.20")
 End Plate: CSP2.5-1X2
 Shorting Links: SLPU5-2W
 Marking Label: KN5


PQ2.5-2X2



CE RU RU CB

IEC 60947-7-1: 1000 V / 24 A / 2.5 sq mm
 RU RU : 600 V / 20 A / 12-24 AWG
 H36.9(1.45"), W74.7(2.95"), T5(0.20")
 End Plate: CSP2.5-2X2
 Shorting Links: SLPU5-2W
 Marking Label: KN5

PQ4-1X2




CE RU RU CB

IEC 60947-7-1: 1000 V / 32 A / 4 sq mm
 RU RU : 600 V / 30 A / 10-24 AWG
 H36.9(1.45"), W69.6(2.75"), T6(0.24")
 End Plate: CP4-1X2
 Shorting Links: SLPU6-2W
 Marking Label: KN5.5

Multi Conductor Terminals

PQ4-2X2



CE RU RU CB

IEC 60947-7-1: 1000 V / 32 A / 4 sq mm
 RU RU : 600 V / 30 A / 10-24 AWG
 H36.9(1.45"), W83(3.27"), T6(0.24")
 End Plate: CP4-2X2
 Shorting Links: SLPU6-2W
 Marking Label: KN5.5


PQ6-1X2



CE RU RU CB

IEC 60947-7-1: 1000 V / 41 A / 6 sq mm
 RU RU : 600 V / 40 A / 8-24 AWG
 H43.8(1.72"), W81.4(3.21"), T8(0.32")
 End Plate: CP6-1X2
 Shorting Links: SLPU8-2W
 Marking Label: KN8

PQ6-2X2



CE

IEC 60947-7-1: 1000 V / 41 A / 6 sq mm
 H43.8(1.72"), W98.6(3.88"), T8(0.32")
 End Plate: CP6-2X2
 Shorting Links: SLPU8-2W
 Marking Label: KN8

Earth Terminals

PGQ1.5



CE

IEC 60947-7-2: 1.5 sq mm
 H32(1.26"), W47.2(1.86"), T3.5(1.14")
 End Plate: CSEP1.5
 Shorting Links: SLPU3.5-2W
 Marking Label: KN3.5

Earth Terminals

PGQ2.5



CE RU RU CB

IEC 60947-7-2: 2.5 sq mm
RU RU : 12-24 AWG

H36.9(1.45"), W50.7(2.00"), T5(0.20")

End Plate: CSP2.5

Shorting Links: SLPU5-2W

Marking Label: KN5

PGQ4



CE RU RU CB

IEC 60947-7-2: 4 sq mm
RU RU : 10-24 AWG

H36.9(1.45"), W56.2(2.22"), T6(0.24")

End Plate: CSP4

Shorting Links: SLPU6-2W

Marking Label: KN5.5

PGQ6



CE RU RU CB

IEC 60947-7-2: 6 sq mm
RU RU : 8-24 AWG

H43.8(1.72"), W64.2(2.53"), T8(0.32")

End Plate: CSP6

Shorting Links: SLPU8-2W

Marking Label: KN8

PGQ10



CE RU RU CB

IEC 60947-7-2: 10 sq mm
RU RU : 6-24 AWG

H50.3(1.98"), W70.2(2.77"), T10(0.40")


End Plate: CP10

Shorting Links: SLPU10-2W

Marking Label: KN10

Earth Multi Level Terminals

PGQ2.5-2T



CE

IEC 60947-7-2: 2.5 sq mm


H47.9(1.88"), W73.2(2.90"), T5(0.20")

End Plate: CSP2.5-2T

Shorting Links: SLPU5-2W

Marking Label: KN5

PGQ2.5-3T



CE RU RU CB

IEC 60947-7-2: 2.5 sq mm
RU RU : 12-24 AWG

H58.9(2.32"), W108(4.25"), T5(0.20")

End Plate: CP2.5-3T

Shorting Links: SLPU5-2W

Marking Label: KN5

PGQ2.5-1X2



CE RU RU CB

IEC 60947-7-2: 2.5 sq mm
RU RU : 12-24 AWG

H36.9(1.45"), W62.7(2.47"), T5(0.20")

End Plate: CSP2.5-1X2

Shorting Links: SLPU5-2W

Marking Label: KN5

PGQ2.5-2X2



CE RU RU CB

IEC 60947-7-2: 2.5 sq mm
RU RU : 12-24 AWG

H36.9(1.45"), W74.7(2.95"), T5(0.20")


End Plate: CSP2.5-2X2

Shorting Links: SLPU5-2W

Marking Label: KN5

Earth Multi Conductor Terminals

PGQ4-1X2



CE RU RU CB

IEC 60947-7-2: 4 sq mm
RU RU : 10-24 AWG

H36.9(1.45"), W69.6(2.75"), T6(0.24")

End Plate: CP4-1X2

Shorting Links: SLPU6-2W

Marking Label: KN5.5

PGQ4-2X2



CE RU RU CB

IEC 60947-7-2: 4 sq mm
RU RU : 10-24 AWG

H36.9(1.45"), W83(3.27"), T6(0.24")

End Plate: CP4-2X2

Shorting Links: SLPU6-2W

Marking Label: KN5.5

PGQ6-1X2



CE RU RU CB

IEC 60947-7-2: 6 sq mm
RU RU : 8-24 AWG

H43.8(1.72"), W81.4(3.21"), T8(0.32")

End Plate: CP6-1X2

Shorting Links: SLPU8-2W

Marking Label: KN8

Disconnect Terminals

PQK2.5



CE RU RU CB

IEC 60947-7-1: 1000 V / 20 A / 2.5 sq mm
RU RU : 600 V / 16 A / 12-24 AWG

H40.9(1.61"), W62.7(2.47"), T5(0.20")


End Plate: CSP2.5-1X2

Shorting Links: SLPU5-2W

Marking Label: KN5

Disconnect Terminals

PQK4



CE RU RU CB

IEC 60947-7-1: 1000 V / 22 A / 4 sq mm
RU RU : 600 V / 22 A / 10-24 AWG

H40.9(1.61"), W56.2(2.22"), T6(0.24")


End Plate: CPM4

Shorting Links: SLPU6-2W

Marking Label: KN5.5

Disconnect Multi Conductor Terminals

PQK2.5-1X2



CE

IEC 60947-7-1: 1000 V / 20 A / 2.5 sq mm


H40.8(1.61"), W74.7(2.95"), T5(0.20")

End Plate: CSP2.5-2X2

Shorting Links: SLPU5-2W

Marking Label: KN5

PQK2.5-2X2



CE

IEC 60947-7-1: 1000 V / 20 A / 2.5 sq mm

H40.8(1.61"), W86.7(3.42"), T5(0.20")


End Plate: CSP2.5-2X2

Shorting Links: SLPU5-2W

Marking Label: KN5

Sliding Disconnect Terminals

PQD6



CE RU RU CB

IEC 60947-7-1: 1000 V / 30 A / 6 sq mm
RU RU : 600 V / 35 A / 8-24 AWG

H49.4(1.95"), W104.2(4.11"), T8(0.32")

End Plate: CSPD6

Shorting Links: SLPU8-2W

Marking Label: KN8

Fuse Terminals

PQF4



CE   CB

IEC 60947-7-1: 1000 V / 6.3 A / 4 sq mm
 : 600 V / 6.3 A / 10-24 AWG


H62(2.44"), W56.2(2.22"), T6(0.24")

End Plate: CPEK4

Shorting Links: SLPU6-2W

Marking Label: KN5.5

PQF4-LED*



CE   CB

IEC 60947-7-1: 1000 V / 6.3 A / 4 sq mm
 : 600 V / 6.3 A / 10-24 AWG

H62(2.44"), W56.2(2.22"), T6(0.24")


End Plate: CPEK4

Shorting Links: SLPU6-2W

Marking Label: KN5.5

Multi Level Fuse Terminals

PQF4-2T



CE

IEC 60947-7-1: 1000 V/UT-6.3 A, LT- 28 A/4 sq mm

H72.6(2.86"), W99.3(3.91"), T6(0.24")

End Plate: CP4-2T

Shorting Links: SLPU6-2W

Marking Label: KN5.5

PCB Connector

PQT2.5




CE

IEC 60947-7-1: 500 V / 15 A / 2.5 sq mm

H18.5(0.73"), W19(0.75"), T7.5(0.30")


Marking Label: KN7.5

* AD12V=12V, AD24V=24V, AD48V=48V, AD110V=110V, AD240V=240V

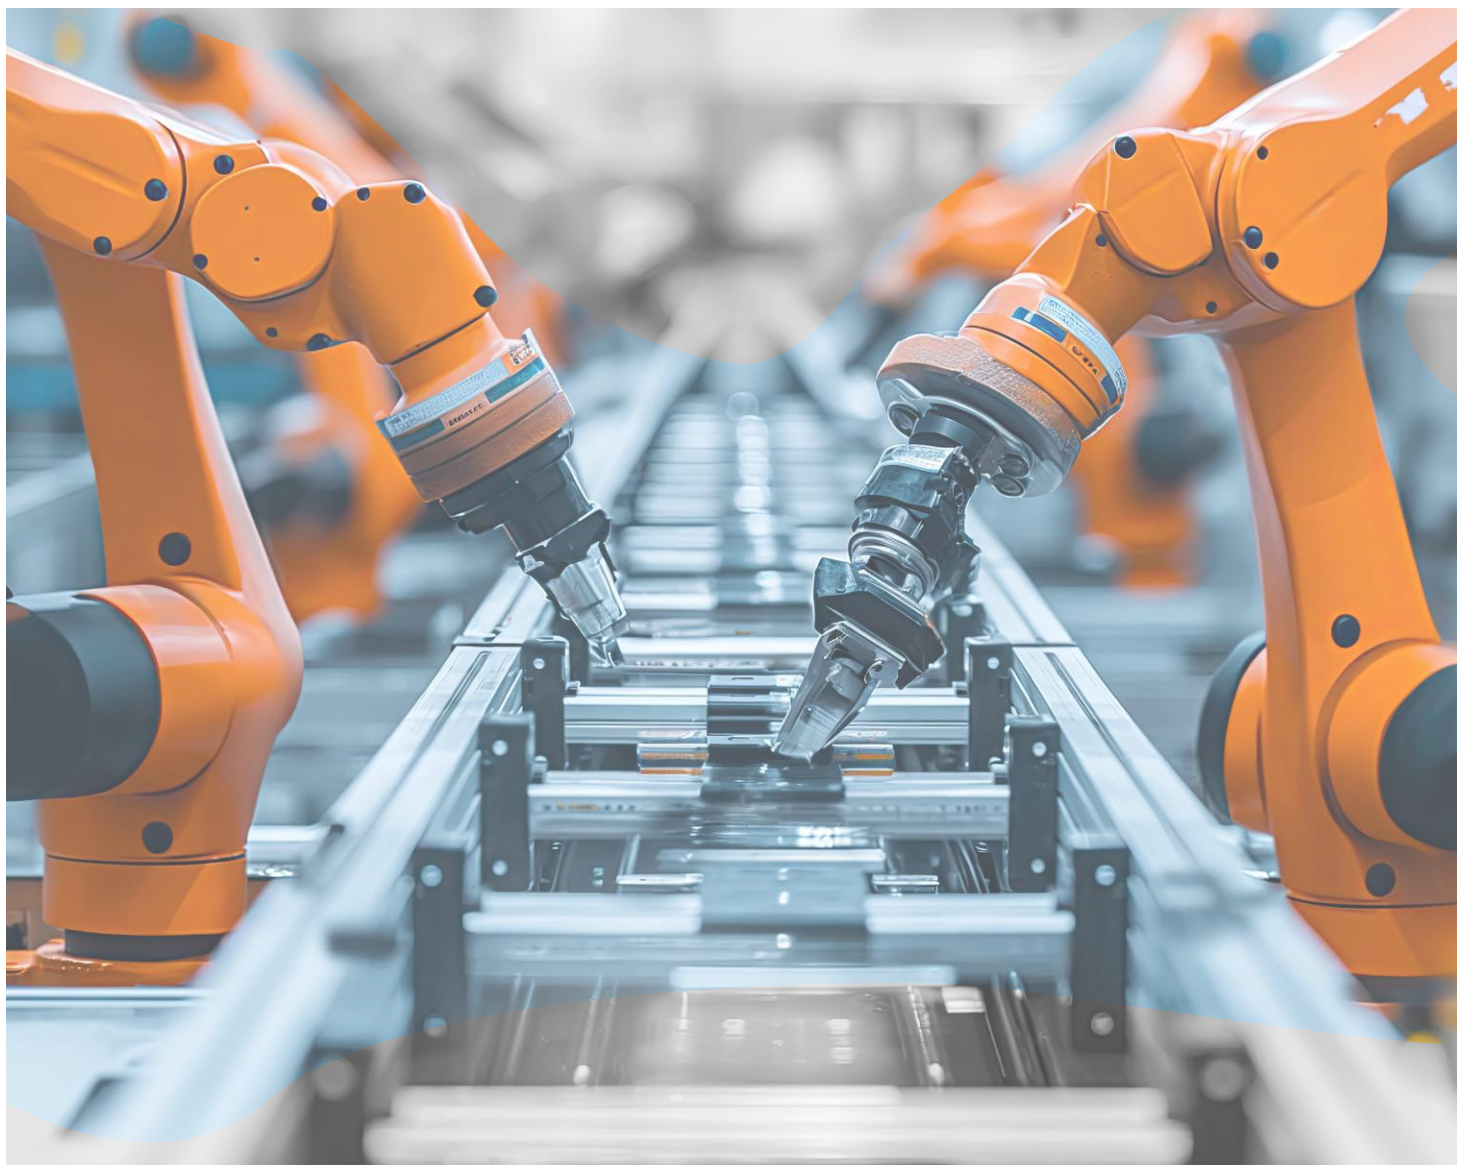

Push-In Relay Terminals


1 CHANGEOVER ELECTROMECHANICAL
6.2mm RELAY TERMINAL UNIT

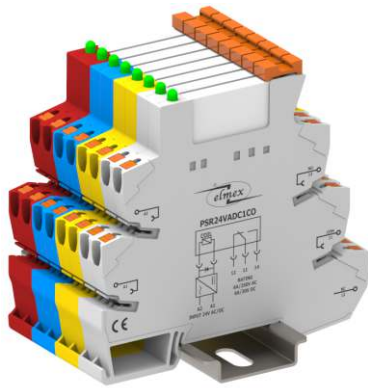

Base Unit	PSR24VADC1CO		PSR240VADC1CO	
Pitch (in mm)	6.2			
Dimension(Height x Width)(in mm)	91 X 86			
Connection Method	Push In Connection			
Connection Possibility	2.5 sq mm			
Relay Actuation Data				
Nominal Voltage (Vn) to actuate	24 V DC / AC		240 V DC / AC	
Nominal Current (In) to actuate	11 mA		14 mA	
Contact Data				
Contact Rating	6 A, 250 VAC / 30 VDC			
Compatible Contact Arrangement	1 FORM C			

Shorting Link SLP56-2W, 4W, 8W, 10W, 16W and 24W

SOLID STATE
6.2 mm RELAY TERMINAL UNIT

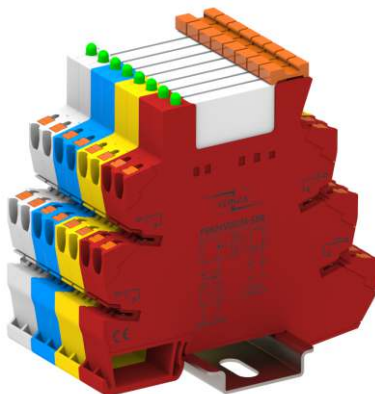

Base Unit	PSR24VDD24-SSR		PSR24VDA24-SSR	
Pitch (in mm)	6.2			
Dimension(Height x Width)(in mm)	91 X 86			
Connection Method	Push In Connection			
Connection Possibility	2.5 sq mm			
Relay Actuation Data				
Input Control Voltage	3 - 32 VDC		3 - 32 VDC	
Input Control Supply Current	12 mA		12 mA	
Contact Data				
Rated Voltage	5 - 100 VDC		24 - 280 VAC	
Rated Current	2 A @ 55°C		2 A @ 55°C	

Shorting Link SLP56-2W, 4W, 8W, 10W, 16W and 24W

elmex AURIGA

Spring Clamp Technology

Auriga is a beautiful pentagon-shaped constellation on the celestial equator. It is derived from Latin, and means “The Charioteer” in Greek mythology. This highlights the “Spring Clamp” Auriga range as the work-horse of the *elmex* range that will drive growth and power a brighter tomorrow.

Spring Clamp technology

Enhanced clamping force for conductor retention

Better wiring efficiency and productivity


Rated for 1000V

Twin shorting facility


Top marking label provision

Suitable for prepared as well as unprepared conductors


Vibration resistant connection

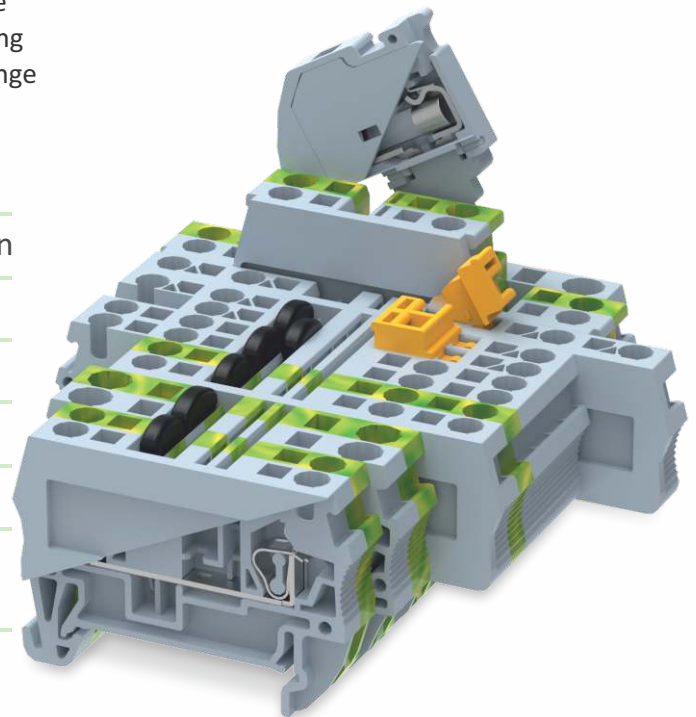


Solutions for a Range of Applications




**Feed Through
Terminals**




**Multiple Output
Terminals**




**Earth (Grounding)
Terminals**



**Multi level
Terminals**




**Disconnecting
Terminals**



**Fuse
Terminals**

Feed Through Terminals

SQ2.5



CE   CB

IEC 60947-7-1: 1000 V / 24 A / 2.5 sq mm
  : 600 V / 20 A / 12-24 AWG


H36.9(1.45"), W50.7(2.00"), T5(0.20")

End Plate: CSP2.5

Shorting Links: SLPU5-2W

Marking Label: KN5

SQ4



CE   CB

IEC 60947-7-1: 1000 V / 32 A / 4 sq mm
  : 600 V / 30 A / 10-24 AWG

H36.9(1.45"), W56.2(2.22"), T6(0.24")

End Plate: CSP4

Shorting Links: SLPU6-2W

Marking Label: KN5.5

SQ6



CE   CB

IEC 60947-7-1: 1000 V / 41 A / 6 sq mm
  : 600 V / 50 A / 8-24 AWG

H43.8(1.72"), W64.2(2.53"), T8(0.32")

End Plate: CSP6

Shorting Links: SLPU8-2W

Marking Label: KN8

SQ10



CE   CB

IEC 60947-7-1: 1000 V / 57 A / 10 sq mm
  : 600 V / 65 A / 6-24 AWG

H48.9(1.92"), W73.7(2.91"), T10(0.40")


End Plate: CSP10

Shorting Links: SLPU10-2W

Marking Label: KN10

Feed Through Terminals

SQ16



CE   CB

IEC 60947-7-1: 1000 V / 76 A / 16 sq mm
  : 600 V / 85 A / 4-24 AWG

H51.4(2.02"), W83.2(3.27"), T12(0.48")

End Plate: CSP16

Shorting Links: SLPU12-2W

Marking Label: KN12

SQ2.5-2T



CE   CB

IEC 60947-7-1: 1000 V / 24 A / 2.5 sq mm
  : 600 V / 20 A / 12-24 AWG

H47.9(1.88"), W73.2(2.88"), T5(0.20")

End Plate: CSP2.5-2T

Shorting Links: SLPU5-2W

Marking Label: KN5

SQ2.5-2T+IS



CE CB

IEC 60947-7-1: 1000 V / 24 A / 2.5 sq mm


H47.9(1.88"), W73.2(2.89"), T5(0.20")

End Plate: CSP2.5-2T

Shorting Links: SLPU5-2W

Marking Label: KN5

SQ2.5-3T



CE   CB

IEC 60947-7-1: 1000 V / 24 A / 2.5 sq mm
  : 600 V / 20 A / 12-24 AWG

H58.9(2.35"), W107.7(4.24"), T5(0.20")


End Plate: CSP2.5-3T

Shorting Links: SLPU5-2W

Marking Label: KN5.5

Multi Level Terminals

SQ4-2T



CE   CB

IEC 60947-7-1: 1000 V / 32 A / 4 sq mm
  : 600 V / 30 A / 10-24 AWG


H47.9(1.88"), W88(3.46"), T6(0.24")

End Plate: CSP4-2T

Shorting Links: SLPU6-2W

Marking Label: KN5.5

SQ2.5-1X2



CE   CB

IEC 60947-7-1: 1000 V / 24 A / 2.5 sq mm
  : 600 V / 20 A / 12-24 AWG


H36.9(1.45"), W62.7(2.47"), T5(0.20")

End Plate: CSP2.5-1X2

Shorting Links: SLPU5-2W

Marking Label: KN5

SQ2.5-2X2



CE   CB

IEC 60947-7-1: 1000 V / 24 A / 2.5 sq mm
  : 600 V / 20 A / 12-24 AWG


H36.9(1.45"), W74.7(2.94"), T5(0.20")

End Plate: CSP2.5-2X2

Shorting Links: SLPU5-2W

Marking Label: KN5

SQ4-1X2



CE   CB

IEC 60947-7-1: 1000 V / 32 A / 4 sq mm
  : 600 V / 30 A / 10-24 AWG

H36.9(1.45"), W73.2(2.89"), T6(0.24")


End Plate: CSP4-1X2

Shorting Links: SLPU6-2W

Marking Label: KN5.5

Multi Conductor Terminals

SQ4-2X2



CE   CB

IEC 60947-7-1: 1000 V / 32 A / 4 sq mm
  : 600 V / 30 A / 10-24 AWG


H36.9(1.45"), W90.2(3.56"), T6(0.24")

End Plate: CSP4-2X2

Shorting Links: SLPU6-2W

Marking Label: KN5.5

SQ6-1X2



CE   CB

IEC 60947-7-1: 1000 V / 41 A / 6 sq mm
  : 600 V / 50 A / 8-24 AWG

H43.8(1.73"), W84.6(3.34"), T8(0.32")

End Plate: CSP6-1X2

Shorting Links: SLPU8-2W

Marking Label: KN8

SQ10-1X2



CE   CB

IEC 60947-7-1: 1000 V / 57 A / 10 sq mm
  : 600 V / 65 A / 6-24 AWG


H48.9(1.93"), W99(3.90"), T10(0.40")

End Plate: CSP10-1X2

Shorting Links: SLPU10-2W

Marking Label: KN10

SQ16-1X2



CE   CB

IEC 60947-7-1: 1000 V / 76 A / 16 sq mm
  : 600 V / 85 A / 4-24 AWG

H51.4(2.02"), W110.3(4.35"), T12(0.48")


End Plate: CSP16-1X2

Shorting Links: SLPU12-2W

Marking Label: KN12

Earth Terminals

SGQ2.5



CE RU RU CB

IEC 60947-7-2: 2.5 sq mm
RU RU : 12-24 AWG


H36.9(1.45"), W50.7(2.00"), T5(0.20")

End Plate: CSP2.5

Shorting Links: SLPU5-2W

Marking Label: KN5

SGQ4



CE RU RU CB

IEC 60947-7-2: 4 sq mm
RU RU : 10-24 AWG


H36.9(1.45"), W56.2(2.22"), T6(0.24")

End Plate: CSP4

Shorting Links: SLPU6-2W

Marking Label: KN5.5

SGQ6



CE RU RU CB

IEC 60947-7-2: 6 sq mm
RU RU : 8-24 AWG

H43.8(1.72"), W64.2(2.53"), T8(0.32")

End Plate: CSP6

Shorting Links: SLPU8-2W

Marking Label: KN8

SGQ10



CE RU RU CB

IEC 60947-7-2: 10 sq mm
RU RU : 6-24 AWG

H48.9(1.92"), W73.7(2.91"), T10(0.40")

End Plate: CSP10

Shorting Links: SLPU10-2W

Marking Label: KN10

Earth Terminals

SGQ16



IEC 60947-7-2: 16 sq mm
RU RU : 4-24 AWG

H51.4(2.02"), W83.2(3.28"), T12(0.48")

End Plate: CSP16

Shorting Links: SLPU12-2W

Marking Label: KN12

Earth Multi Level Terminals

SGQ2.5-2T



IEC 60947-7-2: 2.5 sq mm
RU RU : 12-24 AWG

H47.9(1.88"), W73.2(2.89"), T5(0.20")

End Plate: CSP2.5-2T

Shorting Links: SLPU5-2W

Marking Label: KN5

SGQ2.5-3T



IEC 60947-7-2: 2.5 sq mm
RU RU : 12-24 AWG

H58.9(2.32"), W107.7(4.24"), T5(0.20")

End Plate: CSP2.5-3T

Shorting Links: SLPU5-2W

Marking Label: KN5

SGQ4-2T



IEC 60947-7-2: 4 sq mm
RU RU : 10-24 AWG

H47.9(1.88"), W88(3.46"), T6(0.24")

End Plate: CSP4-2T

Shorting Links: SLPU6-2W

Marking Label: KN5.5

Earth Multi Conductor Terminals

SGQ2.5-1X2



CE RU RU CB

IEC 60947-7-2: 2.5 sq mm
RU RU : 12-24 AWG

H36.9(1.45"), W62.7(2.47"), T5(0.20")

End Plate: CSP2.5-1X2

Shorting Links: SLPU5-2W

Marking Label: KN5

SGQ2.5-2X2



CE RU RU CB

IEC 60947-7-2: 2.5 sq mm
RU RU : 12-24 AWG

H36.9(1.45"), W74.7(2.95"), T5(0.20")

End Plate: CSP2.5-2X2

Shorting Links: SLPU5-2W

Marking Label: KN5

SGQ4-1X2



CE RU RU CB

IEC 60947-7-2: 4 sq mm
RU RU : 10-24 AWG


H36.9(1.45"), W73.2(2.89"), T6(0.24")

End Plate: CSP4-1X2

Shorting Links: SLPU6-2W

Marking Label: KN5.5

SGQ4-2X2



CE RU RU CB

IEC 60947-7-2: 4 sq mm
RU RU : 10-24 AWG

H36.9(1.45"), W90.2(3.56"), T6(0.24")


End Plate: CSP4-2X2

Shorting Links: SLPU6-2W

Marking Label: KN5.5

Earth Multi Conductor Terminals

SGQ6-1X2



CE RU RU CB

IEC 60947-7-2: 6 sq mm
RU RU : 8-24 AWG

H43.8(1.72"), W84.6(3.34"), T8(0.32")

End Plate: CSP6-1X2

Shorting Links: SLPU8-2W

Marking Label: KN8

SGQ10-1X2



CE RU RU CB

IEC 60947-7-2: 10 sq mm
RU RU : 6-24 AWG


H48.9(1.93"), W99(3.90"), T10(0.40")

End Plate: CSP10-1X2

Shorting Links: SLPU10-2W

Marking Label: KN10

SGQ16-1X2



CE RU RU CB


IEC 60947-7-2: 16 sq mm
RU RU : 4-24 AWG

H51.4(2.02"), W110.3(4.35"), T12(0.48")

End Plate: CSP16-1X2


Shorting Links: SLPU12-2W

Marking Label: KN12



Disconnect Terminals

SQK2.5



CE RU CB

IEC 60947-7-1: 1000 V / 20 A / 2.5 sq mm
RU : 600 V / 16 A / 12-24 AWG


H40.9(1.62"), W62.7(2.48"), T5(0.20")

End Plate: CSP2.5-1X2

Shorting Links: SLPU5-2W

Marking Label: KN5

SQK4



CE RU CB

IEC 60947-7-1: 1000 V / 22 A / 4 sq mm
RU : 600 V / 22 A / 10-24 AWG

H40.9(1.62"), W62.4(2.46"), T6(0.24")


End Plate: Not Required

Shorting Links: SLPU6-2W

Marking Label: KN5.5

Disconnect Multi Conductor Terminals

SQK2.5-1X2



CE RU CB

IEC 60947-7-1: 1000 V / 20 A / 2.5 sq mm
RU : 600 V / 16 A / 12-24 AWG


H40.9(1.62"), W74.3(2.92"), T5(0.20")

End Plate: CSP2.5-2X2

Shorting Links: SLPU5-2W

Marking Label: KN5

SQK2.5-2X2



CE RU CB

IEC 60947-7-1: 1000 V / 20 A / 2.5 sq mm
RU : 600 V / 16 A / 12-24 AWG

H40.9(1.62"), W86.7(3.42"), T5(0.20")


End Plate: CSK2.5-2X2

Shorting Links: SLPU5-2W

Marking Label: KN5

Fuse Terminals

SQF4



CE RU CB

IEC 60947-7-1: 1000 V / 10 A / 4 sq mm
RU : 600 V / 6.3 A / 10-24 AWG

H62.1(2.44"), W62.4(2.46"), T6(0.24")

End Plate: Not Required

Shorting Links: SLPU6-2W

Marking Label: KN5.5

SQF4-LED*



CE RU CB

IEC 60947-7-1: 1000 V / 10 A / 4 sq mm
RU : 600 V / 6.3 A / 10-24 AWG

H62.1(2.44"), W62.4(2.46"), T6(0.24")

End Plate: Not Required

Shorting Links: SLPU6-2W

Marking Label: KN5.5

Micro Terminals

SQM2.5 (15mm Rail Mounted)



CE RU CB

IEC 60947-7-1: 1000 V / 24 A / 2.5 sq mm
RU : 600 V / 20 A / 12-24 AWG


H34.2(1.34"), W39.8(1.56"), T5(0.20")

End Plate: CSPM2.5

Shorting Links: SLPU5-2W

Marking Label: KN5

SQP2.5 (Panel Mounted)



CE RU CB

IEC 60947-7-1: 800 V / 24 A / 2.5 sq mm
RU : 300 V / 20 A / 12-24 AWG

H21(0.82"), W32(1.26"), T5(0.20")

End Plate: CPP2.5

Shorting Links: SLFP2.5-2W

Marking Label: KN5

Micro Terminals

SQP2.5P4 (Panel Mounted)



CE RU CB

IEC 60947-7-1: 800 V / 24 A / 2.5 sq mm
RU : 300 V / 20 A / 12-24 AWG

H21(0.82"), W32(1.26"), T10(0.40")

End Plate: CPP2.5

Shorting Links: SLFP2.5-2W

Marking Label: KN10

SQTP2.5 (Panel Mounted)



CE

IEC 60947-7-1: 800 V / 24 A / 2.5 sq mm

H22(0.87"), W32(1.26"), T5(0.20")

End Plate: SQTPCP

Shorting Links: SLFP2.5-2W

Marking Label: KNLVR5

SQTP2.5WPM (Panel Mounted)



CE

IEC 60947-7-1: 800 V / 24 A / 2.5 sq mm

H22(0.87"), W32(1.26"), T5(0.20")

End Plate: SQTPCP

Shorting Links: SLFP2.5-2W

Marking Label: KNLVR5

SQTP2.5P4 (Panel Mounted)



CE

IEC 60947-7-1: 800 V / 24 A / 2.5 sq mm

H22(0.87"), W32(1.26"), T10(0.40")

End Plate: SQTPCP

Shorting Links: SLFP2.5-2W

Marking Label: KNLVR5

Micro Terminals

SQTP2.5P4WPM (Panel Mounted)



CE

IEC 60947-7-1: 800 V / 24 A / 2.5 sq mm


H22(0.87"), W32(1.26"), T10(0.40")

End Plate: SQTPCP

Shorting Links: SLFP2.5-2W

Marking Label: KNLVR5

SQECD



CE

IEC 60947-7-1: 250 V / 15 A / 2.5 sq mm

H14.2(0.56"), W15.4(0.61"), T5.08(0.20")

End Plate: SQECDPCP

SQECDD



CE

IEC 60947-7-1: 800 V / 24 A / 2.5 sq mm

H29(1.15"), W22.1(0.88"), T5.08(0.20")

End Plate: SQECDDCP



* AD12V=12V, AD24V=24V, AD48V=48V, AD110V=110V, AD240V=240V

elmex AQUILA

Screw Clamp Technology

Aquila is a constellation on the celestial equator. It stands for “Eagle” in Latin and represents a bird in Greek-Roman mythology. This name reflects the “Screw Clamp” Aquila range as one that is a soaring example of innovation that holds the highest standards.

Screw Clamp technology

Higher torque withstand capacity

Rated for 1000V

Twin shorting facility

Top marking label provision


Suitable for prepared as well as unprepared conductors

Guided wire entry


Possibility for wider range of conductors




Solutions for a Range of Applications



**Feed Through
Terminals**




**Multiple Output
Terminals**




**Earth (Grounding)
Terminals**



**Multi level
Terminals**




**Disconnecting
Terminals**



**Fuse
Terminals**

Feed Through Terminals

TQ2.5



CE   CB

IEC 60947-7-1: 1000 V / 24 A / 2.5 sq mm / 0.4 Nm
  : 600 V / 25 A / 12-24 AWG / 3.6 Lbln


H45.9(1.81"), W58.5(2.31"), T5(0.20")

End Plate: CTP2.5-10

Shorting Links: SLPU5-2W

Marking Label: KN5

TQ4



CE   CB

IEC 60947-7-1: 1000 V / 32 A / 4 sq mm / 0.5 Nm
  : 600 V / 30 A / 10-24 AWG / 4.5 Lbln


H45.9(1.81"), W58.5(2.31"), T6(0.24")

End Plate: CTP2.5-10

Shorting Links: SLPU6-2W

Marking Label: KN5.5

TQ6



CE   CB

IEC 60947-7-1: 1000 V / 41 A / 6 sq mm / 0.8 Nm
  : 600 V / 50 A / 8-24 AWG / 7 Lbln


H45.9(1.81"), W58.5(2.31"), T8(0.32")

End Plate: CTP2.5-10

Shorting Links: MLPU8-2W

Marking Label: KN8

TQ10



CE   CB

IEC 60947-7-1: 1000 V / 57 A / 10 sq mm / 1.2 Nm
  : 600 V / 65 A / 6-24 AWG / 10.7 Lbln

H45.9(1.81"), W58.5(2.31"), T10(0.40")

End Plate: CTP2.5-10

Shorting Links: MLPU10-2W

Marking Label: KN10

Feed Through Terminals

TQC16



CE   CB

IEC 60947-7-1: 1000 V / 76 A / 16 sq mm / 2.0 Nm
  : 600 V / 85 A / 4-24 AWG / 20 Lbln

H54.7(2.16"), W53.6(2.11"), T12(0.48")

End Plate: Not Required

Shorting Links: MLPU12-2W

Marking Label: KN12

TQC25



CE  CB

IEC 60947-7-1: 1000 V / 101 A / 25 sq mm / 2.3 Nm

H56.5(2.22"), W54(2.13"), T12(0.48")

End Plate: Not Required

Shorting Links: CCLA25-2W

Marking Label: KN12

Multi Level Terminals

TQ2.5-2T



CE   CB

IEC 60947-7-1: 500 V / 24 A / 2.5 sq mm / 0.4 Nm
  : 300 V / 20 A / 12-24 AWG / 3.6 Lbln

H63(2.49"), W70.6(2.78"), T5(0.20")

End Plate: CTP2.5_4-2T

Shorting Links: SLPU5-2W

Marking Label: KN5

TQ2.5-2T+WOE



CE  CB

IEC 60947-7-1: 400 V / 24 A / 2.5 sq mm / 0.4 Nm

H56.5(2.23"), W76.1(3.00"), T6(0.24")

End Plate: TEP2.5-2T+E

Shorting Links: SLPU6-2W

Marking Label: KN5.5

Multi Level Terminals

TQ2.5-2T+E



CE   CB

IEC 60947-7-1: 400 V / 24 A / 2.5 sq mm / 0.4 Nm
  : 300 V / 20 A / 12-24 AWG / 3.6 Lbln

H56.5(2.23"), W76.1(3.00"), T6(0.24")

End Plate: TEP2.5-2T+E

Shorting Links: SLPU6-2W

Marking Label: KN5.5

TQ2.5-3T



CE   CB

IEC 60947-7-1: 1000 V / 24 A / 2.5 sq mm / 0.4 Nm
  : 300 V / 20 A / 12-24 AWG / 3.6 Lbln


H71(2.80"), W88(3.47"), T6(0.24")

End Plate: CTP2.5-3T

Shorting Links: SLPU6-2W

Marking Label: KN5.5

TQ2.5-3T+WOE



CE  CB

IEC 60947-7-1: 400 V / 24 A / 2.5 sq mm / 0.4 Nm

H72(2.84"), W94.6(3.72"), T6(0.24")

End Plate: TEP2.5-3T+E

Shorting Links: SLPU6-2W

Marking Label: KN5.5

TQ2.5-3T+E



CE   CB

IEC 60947-7-1: 400 V / 24 A / 2.5 sq mm / 0.4 Nm
  : 300 V / 20 A / 12-24 AWG / 3.6 Lbln

H72(2.84"), W94.6(3.72"), T6(0.24")

End Plate: TEP2.5-3T+E

Shorting Links: SLPU6-2W

Marking Label: KN5.5

Multi Level Terminals

TQ4-2T



CE   CB

IEC 60947-7-1: 500 V / 32 A / 4 sq mm / 0.5 Nm
  : 300 V / 30 A / 10-24 AWG / 4.5 Lbln

H63(2.49"), W70.6(2.78"), T6(0.24")


End Plate: CTP2.5_4-2T

Shorting Links: SLPU6-2W

Marking Label: KN5.5

Multiconductor Terminals

TQKFT2.5-1X2



CE   CB

IEC 60947-7-1: 500 V / 24 A / 2.5 sq mm / 0.4 Nm
  : 300 V / 20 A / 12-24 AWG / 3.6 Lbln


H48.8(1.92"), W61.5(2.42"), T5(0.20")

End Plate: CTP2.5-1X2

Shorting Links: SLPU5-2W

Marking Label: KN5

TQKFT2.5-2X2



CE   CB

IEC 60947-7-1: 500 V / 24 A / 2.5 sq mm / 0.4 Nm
  : 300 V / 20 A / 12-24 AWG / 3.6 Lbln

H48.8(1.92"), W68.6(2.70"), T5(0.20")

End Plate: CTP2.5-2X2

Shorting Links: SLPU5-2W

Marking Label: KN5

TQKFT4-1X2



CE   CB

IEC 60947-7-1: 500 V / 32 A / 4 sq mm / 0.5 Nm
  : 300 V / 30 A / 10-24 AWG / 4.5 Lbln

H49.4(1.94"), W61.1(2.41"), T6(0.24")


End Plate: CTP2.5-1X2

Shorting Links: SLPU6-2W

Marking Label: KN5.5

Multiconductor Terminals

TQKFT4-2X2



CE RU RU CB

IEC 60947-7-1: 500 V / 32 A / 4 sq mm / 0.5 Nm
 RU RU : 300 V / 30 A / 10-24 AWG / 4.5 Lbln
 H49.4(1.94"), W68.6(2.70"), T6(0.24")
 End Plate: CTP2.5-2X2
 Shorting Links: SLPU6-2W
 Marking Label: KN5.5

Earth Terminals

TGQ2.5



CE RU RU CB

IEC 60947-7-2: 2.5 sq mm / 0.4 Nm
 RU RU : 12-24 AWG / 3.6 Lbln
 H45.9(1.81"), W58.5(2.31"), T5(0.20")
 End Plate: CTP2.5-10
 Shorting Links: SLPU5-2W
 Marking Label: KN5

TGQ4



CE RU RU CB

IEC 60947-7-2: 4 sq mm / 0.5 Nm
 RU RU : 10-24 AWG / 4.5 Lbln
 H45.9(1.81"), W58.5(2.31"), T6(0.24")
 End Plate: CTP2.5-10
 Shorting Links: SLPU6-2W
 Marking Label: KN5.5

TGQ6



CE RU RU CB

IEC 60947-7-2: 4 sq mm / 0.8 Nm
 RU RU : 8-24 AWG / 7 Lbln
 H45.9(1.81"), W58.5(2.31"), T8(0.32")
 End Plate: CTP2.5-10
 Shorting Links: MLPU8-2W
 Marking Label: KN8

Earth Terminals

TGQ10



CE RU RU CB

IEC 60947-7-2: 10 sq mm / 1.2 Nm
 RU RU : 6-24 AWG / 10.7 Lbln
 H45.9(1.81"), W58.5(2.31"), T10(0.40")
 End Plate: CTP2.5-10
 Shorting Links: MLPU10-2W
 Marking Label: KN10

TGQC16



CE RU RU CB

IEC 60947-7-2: 16 sq mm / 2.0 Nm
 RU RU : 4-24 AWG / 20 Lbln
 H54.7(2.16"), W51(2.01"), T12(0.48")
 End Plate: Not Required
 Shorting Links: MLPU12-2W
 Marking Label: KN12

Earth Multi Level Terminals

TGQ2.5-2T



CE RU RU CB

IEC 60947-7-1: 2.5 sq mm / 0.4 Nm
 RU RU : 12-24 AWG / 3.6 Lbln
 H63(2.49"), W70.7(2.78"), T5(0.20")
 End Plate: CTP2.5_4-2T
 Shorting Links: SLPU5-2W
 Marking Label: KN5

TGQ2.5-3T



CE RU RU CB

IEC 60947-7-1: 2.5 sq mm / 0.4 Nm
 RU RU : 12-24 AWG / 3.6 Lbln
 H70.5(2.78"), W90(3.54"), T6(0.24")
 End Plate: CTP2.5-3T
 Shorting Links: SLPU6-2W
 Marking Label: KN5.5

Earth Multi Level Terminals

TGQ4-2T



CE RU RU CB

IEC 60947-7-1: 4 sq mm / 0.5 Nm
 RU RU : 10-24 AWG / 4.5 Lbln
 H63(2.49"), W70.6(2.78"), T6(0.24")
 End Plate: CTP2.5_4-2T
 Shorting Links: SLPU6-2W
 Marking Label: KN5.5

Earth Multiconductor Terminals

TGQ2.5-1X2



CE RU RU CB

IEC 60947-7-2: 2.5 sq mm / 0.4 Nm
 RU RU : 12-24 AWG / 3.6 Lbln
 H46.7(1.84"), W61.1(2.41"), T5(0.20")
 End Plate: CTP2.5-1X2
 Shorting Links: SLPU5-2W
 Marking Label: KN5

TGQ2.5-2X2




CE RU RU CB

IEC 60947-7-2: 2.5 sq mm / 0.4 Nm
 RU RU : 12-24 AWG / 3.6 Lbln
 H46.7(1.84"), W68.6(2.70"), T5(0.20")
 End Plate: CTP2.5-2X2
 Shorting Links: SLPU5-2W
 Marking Label: KN5

Disconnect Terminals

TQK2.5




CE RU RU CB

IEC 60947-7-1: 1000 V / 20 A / 2.5 sq mm / 0.4 Nm
 RU RU : 600 V / 16 A / 12-24 AWG / 3.6 Lbln
 H45.9(1.81"), W58.5(2.31"), T5(0.20")
 End Plate: CTP2.5-10
 Shorting Links: SLPU5-2W
 Marking Label: KN5

Disconnect Terminals


TQK4



CE RU RU CB

IEC 60947-7-1: 1000 V / 22 A / 4 sq mm / 0.5 Nm
 RU RU : 600 V / 20 A / 10-24 AWG / 4.5 Lbln
 H49.9(1.96"), W58.5(2.31"), T6(0.24")
 End Plate: Not Required
 Shorting Links: SLPU6-2W
 Marking Label: KN5.5

TQK6



CE RU RU CB

IEC 60947-7-1: 1000 V / 22 A / 6 sq mm / 0.8 Nm
 RU RU : 300 V / 20 A / 8-24 AWG / 7 Lbln
 H49.9(1.96"), W58.5(2.31"), T8(0.32")
 End Plate: Not Required
 Shorting Links: MLPU8-2W
 Marking Label: KN8

Disconnect Multi Level Terminals

TQK4-2T



CE RU RU CB

IEC 60947-7-1: 1000 V / UT-20 A, LT-32 A / 4 sq mm / 0.5 Nm
 RU RU : 300 V / UT-20 A, LT-30 A / 10-24 AWG / 4.5 Lbln
 H75.7(2.98"), W91(3.59"), T6(0.24")
 End Plate: Not Required
 Shorting Links: SLPU6-2W
 Marking Label: KN5.5

TQK4-2T+E




CE RU RU CB

IEC 60947-7-1: 1000 V / UT-20 A, LT-32 A / 4 sq mm / 0.5 Nm
 RU RU : 300 V / UT-20 A, LT-30 A / 10-24 AWG / 4.5 Lbln
 H75.7(2.98"), W91(3.59"), T6(0.24")
 End Plate: Not Required
 Shorting Links: SLPU6-2W
 Marking Label: KN5.5

Disconnect Multi Conductor Terminals

TQK2.5-1X2



CE RU RU CB

IEC 60947-7-1: 500 V / 20 A / 2.5 sq mm / 0.4 Nm
 RU RU : 300 V / 16 A / 12-24 AWG / 3.6 Lbln


H49.7(1.95"), W61.1(2.41"), T5(0.20")

End Plate: CTP2.5-1X2

Shorting Links: SLPUS-2W

Marking Label: KN5

TQK2.5-2X2



CE RU RU CB

IEC 60947-7-1: 500 V / 20 A / 2.5 sq mm / 0.4 Nm
 RU RU : 300 V / 16 A / 12-24 AWG / 3.6 Lbln


H49.7(1.95"), W68.6(2.70"), T5(0.20")

End Plate: CTP2.5-2X2

Shorting Links: SLPUS-2W

Marking Label: KN5

TQK4-1X2



CE RU RU CB

IEC 60947-7-1: 1000 V / 22 A / 4 sq mm / 0.5 Nm
 RU RU : 300 V / 20 A / 10-24 AWG / 4.5 Lbln


H49.9(1.96"), W61.1(2.41"), T6(0.24")

End Plate: CTP2.5-1X2

Shorting Links: SLPUG-2W

Marking Label: KN5.5

TQK4-2X2



CE RU RU CB

IEC 60947-7-1: 1000 V / 22 A / 4 sq mm / 0.5 Nm
 RU RU : 300 V / 20 A / 10-24 AWG / 4.5 Lbln

H49.9(1.96"), W68.6(2.70"), T6(0.24")


End Plate: CTP2.5-2X2

Shorting Links: SLPUG-2W

Marking Label: KN5.5

Fuse Terminals

TQF4



CE RU RU CB

IEC 60947-7-1: 1000 V / 6.3 A / 4 sq mm / 0.5 Nm
 RU RU : 600 V / 6.3 A / 10-24 AWG / 4.5 Lbln


H71.1(2.79"), W58.5(2.31"), T6(0.24")

End Plate: Not Required

Shorting Links: SLPUG-2W

Marking Label: KN5.5

TQF4-LED*



CE RU RU CB

IEC 60947-7-1: 1000 V / 6.3 A / 4 sq mm / 0.5 Nm
 RU RU : 600 V / 6.3 A / 10-24 AWG / 4.5 Lbln

H71.1(2.79"), W58.5(2.31"), T6(0.24")

End Plate: Not Required

Shorting Links: SLPUG-2W

Marking Label: KN5.5

TQF6



CE RU RU CB

IEC 60947-7-1: 1000 V / 10 A / 6 sq mm / 0.8 Nm
 RU RU : 300 V / 6.3 A / 8-24 AWG / 7 Lbln


H71.1(2.79"), W58.5(2.31"), T8(0.32")

End Plate: Not Required

Shorting Links: MLPUG-2W

Marking Label: KN8

TQF6-LED*



CE RU RU CB

IEC 60947-7-1: 1000 V / 10 A / 6 sq mm / 0.8 Nm
 RU RU : 300 V / 6.3 A / 8-24 AWG / 7 Lbln

H71.1(2.79"), W58.5(2.31"), T8(0.32")


End Plate: Not Required

Shorting Links: MLPUG-2W

Marking Label: KN8

Fuse Multi Level Terminals

TQF4-2T



CE RU RU CB

IEC 60947-7-1: 500 V / UT-6.3 A, LT-28 A / 4 sq mm / 0.5 Nm
 RU RU : 300 V / UT-6.3 A, LT-30 A / 10-24 AWG / 4.5 Lbln


H96.5(3.79"), W91(3.59"), T6(0.24")

End Plate: Not Required

Shorting Links: SLPUG-2W

Marking Label: KN5.5

TQF4-2T-LED*



CE RU RU CB

IEC 60947-7-1: 500 V / UT-6.3 A, LT-28 A / 4 sq mm / 0.5 Nm
 RU RU : 300 V / UT-6.3 A, LT-30 A / 10-24 AWG / 4.5 Lbln


H96.5(3.79"), W91(3.59"), T6(0.24")

End Plate: Not Required

Shorting Links: SLPUG-2W

Marking Label: KN5.5

TQF4-2T+E



CE RU RU CB

IEC 60947-7-1: 500 V / UT-6.3 A, LT-28 A / 4 sq mm / 0.5 Nm
 RU RU : 300 V / UT-6.3 A, LT-30 A / 10-24 AWG / 4.5 Lbln

H96.5(3.79"), W91(3.59"), T6(0.24")


End Plate: Not Required

Shorting Links: SLPUG-2W

Marking Label: KN5.5

Stud Type Terminals (Shrouded)

ONTM3-6C**



CE

IEC 60947-7-1: 1000 V / 41 A / 6 sq mm


H37.5(1.48"), W48(1.89"), T9(0.36")

End Plate: ONTEP

Shorting Links: CCLAONT9-2W

Marking Label: ONTML9

ONTM4-10C**



CE

IEC 60947-7-1: 1000 V / 57 A / 10 sq mm

H37.5(1.48"), W48(1.89"), T9(0.36")

End Plate: ONTEP

Shorting Links: CCLAONT13-2W

Marking Label: ONTML13

ONTM5-16C**



CE

IEC 60947-7-1: 1000 V / 76 A / 16 sq mm

H37.5(1.48"), W48(1.89"), T9(0.36")

End Plate: ONTEP

Shorting Links: CCLAONT13-2W

Marking Label: ONTML13



* AD12V=12V, AD24V=24V, AD48V=48V, AD110V=110V, AD240V=240V

** Screw and Nut Driver operated

TC SERIES

Feed Through Terminals

TC2.5



CE 90 90 CB

IEC 60947-7-1: 1000 V / 24 A / 2.5 sq mm / 0.4 Nm
 90 90 : 600 V / 25 A / 12-24 AWG / 3.6 Lbln
 H43(1.70"), W45(1.77"), T5(0.20")
 End Plate: CCTP2.5
 Shorting Links: SLP05-2W
 Marking Label: KN5

TC4



CE 90 90 CB

IEC 60947-7-1: 1000 V / 32 A / 4 sq mm / 0.5 Nm
 90 90 : 600 V / 30 A / 10-24 AWG / 4.5 Lbln
 H46(1.82"), W45.8(1.80"), T6(0.24")
 End Plate: CCTP4-10
 Shorting Links: SLP06-2W
 Marking Label: KN5.5

TC6



CE 90 90 CB

IEC 60947-7-1: 1000 V / 41 A / 6 sq mm / 0.8 Nm
 90 90 : 600 V / 50 A / 8-24 AWG / 7 Lbln
 H46(1.82"), W45.8(1.80"), T8(0.32")
 End Plate: CCTP4-10
 Shorting Links: MLP08-2W
 Marking Label: KN8

TC10



CE 90 90 CB

IEC 60947-7-1: 1000 V / 57 A / 10 sq mm / 1.2 Nm
 90 90 : 600 V / 65 A / 6-24 AWG / 10.7 Lbln
 H46(1.82"), W45.8(1.80"), T10(0.40")
 End Plate: CCTP4-10
 Shorting Links: MLP10-2W
 Marking Label: KN10

Earth Terminals

TGC2.5



90 CE

IEC 60947-7-2: 2.5 sq mm / 0.4 Nm
 90 90 : 12-24 AWG / 3.6 Lbln

H43(1.70"), W45(1.77"), T5(0.20")
 End Plate: CCTP2.5
 Marking Label: KN5

TGC4



90 CE

IEC 60947-7-2: 4 sq mm / 0.5 Nm
 90 90 : 10-24 AWG / 4.5 Lbln

H46(1.82"), W45.8(1.80"), T6(0.24")
 End Plate: CCTP4-10
 Marking Label: KN5.5

TGC6



90 CE

IEC 60947-7-2: 6 sq mm / 0.8 Nm
 90 90 : 8-24 AWG / 7 Lbln

H46(1.82"), W45.8(1.80"), T8(0.32")
 End Plate: CCTP4-10
 Marking Label: KN8

TGC10



90 CE

IEC 60947-7-2: 10 sq mm / 1.2 Nm
 90 90 : 6-24 AWG / 10.7 Lbln

H46(1.82"), W45.8(1.80"), T10(0.40")
 End Plate: CCTP4-10
 Marking Label: KN10



Accessories

MOUNTING CHANNELS

DESCRIPTION	TYPE
35mm Rails (7.5mm Depth)	
300mm Length	CHK3
500mm Length	CHK5
1000mm Length (1 Meter)	CHK10
35mm Rails Perforated Rail (7.5mm Depth) 1000mm Length	CHKS10
35mm Rails (15mm Depth)	
35mm Rails (15mm Depth) 1000mm Length	CHKD10
35mm Rails Perforated Rail (15mm Depth) 1000mm Length	CHKDS10
15mm Rails For Micro Terminals	
500mm Length	CHM5
1000m Length (1 Meter)	CHM10
SIDE CLAMPS	
End Clamps suitable for 15mm Rail	SCMN (POLYAMIDE 6.6)
End Clamps suitable for 35mm Rail	SCKN (POLYAMIDE 6.6)
End Clamps suitable for 35mm Rail with Marking Label Holder	SCKNMLH (POLYAMIDE 6.6)
End Clamps suitable for 32mm and 35mm Rail	SCUN (POLYAMIDE 6.6)
End Clamps suitable for 32mm and 35mm Rail with Marking Label Holder	SCUNMLH (POLYAMIDE 6.6)
End Clamps suitable for 32mm and 35mm Rail	SCUDD (POLYAMIDE 6.6)
End Clamps suitable for 32mm and 35mm Rail (Screwless)	SCUSL (POLYAMIDE 6.6)
End Clamps suitable for 35mm Rail (Screwless)	DCKN (POLYAMIDE 6.6)
End Clamps suitable for 35mm Rail (Screwless)	DCKN 10(POLYAMIDE 6.6)
Marking Label Holder for DCKN	MLH for DCKN
Screwless End Clamps suitable for 35mm Rail with Marking Label Holder (Screwless)	DCKNMLH (POLYAMIDE 6.6)

MARKING LABELS Snap -On Type Marking Label Strips (1 Strip = 10 Nos.)

ARA	AURIGA	AQUILA	TC SERIES	LABEL TYPE
PQ1.5, PGQ1.5	-	-	-	LABEL KN3.5
PQ2.5, PQ2.5-2T, PGQ2.5-2T, PGQ2.5-3T, PQ2.5-1X2, PQ2.5-2X2, PGQ2.5, PGQ2.5-1X2, PGQ2.5-2X2, PQK2.5, PQ2.5-3T, PQK2.5-1X2, PQK2.5-2X2	SQ2.5, SQ2.5-2T, SQ2.5-1X2, SQ2.5-2X2, SGQ2.5, SGQ2.5-1X2, SGQ2.5-2X2, SQK2.5, SQK2.5-2X2, SQM2.5, SQP2.5, SQ2.5-2T+IS, SGQ2.5-2T, SGQ2.5-3T	TQ2.5, TQ2.5-2T, TQKFT2.5-1X2, TQKFT2.5-1X2, TGQ2.5, TQK2.5, TQK2.5-1X2, TQK2.5-2X2, TGQ2.5-1X2, TGQ2.5-2X2,	TC2.5, TGC2.5	LABEL KN5
PQ4, PGQ4, PQK4, PQF4, PQ4-1X2, PQ4-2X2, PGQ4-1X2, PGQ4-2X2, PQ4-2T, PQF4-2T	SQ4, SQ4-2T, SQ4-1X2, SQ4-2X2, SGQ4, SGQ4-1X2, SGQ4-2X2, SQK4, SQF4, SQF4-LED, SQ2.5-3T, SQ4-2T, SGQ4-2T	TQ4, TQ2.5-2T+E, TQ2.5-2T+WOE, TQ2.5-2T+WOE+IS, TQ2.5-3T, TQ2.5-3T+E, TQ4-2T, TGQ4-2T, TQ2.5-3T+WOE, TGQ4, TQK4, TQKFT4-1X2, TQKFT4-2X2, TQF4, TQF4-LED, TQK4-2T+E, TQK4-2T, TQF4-2T, TQF4-2T-LED, TQK4-1X2, TQK4-2X2, TGQ4-2T, TGQ2.5-3T	TC4, TGC4	LABEL KN5.5
PQT2.5	-	-	-	LABEL KN7.5
PQ6, PGQ6, PQ6-1X2, PGQ6-1X2, PQD6, PQ6-2X2, PQT2.5	SQ6, SGQ6, SQ6-1X2, SGQ6-1X2	TQ6, TGQ6, TQF6, TQK6, TQF6-LED	TC6, TGC6	LABEL KN8
PQ10, PGQ10	SQ10, SGQ10, SGQ10-1X2, SQ10-1X2, SQP2.5P4	TQ10, TGQ10	TC10, TGC10	LABEL KN10
PQ16	SQ16, SQ16-1X2, SGQ16-1X2, SGQ16	TQC16, TGQC16, TQC25	-	LABEL KN12
-	-	ONTM3-6C	-	LABEL ONTML9
-	-	ONTM4-10C, ONTM5-16C	-	LABEL ONTML13
-	-	SQTP2.5, SQTP2.5WPM, SQTP2.5P4, SQTP2.5P4WPM	-	LABEL KNLVR5

Accessories

PVC GROUP MARKING CARRIER	
LABEL TYPE	
For 32mm DIN Rail - 10mm Thick	GMH10
For 32mm DIN Rail - 20mm Thick	GMH20

END PLATES				
ARA	AURIGA	AQUILA	TC SERIES	TYPE
PQ1.5	-	-	-	CSP1.5
PGQ1.5	-	-	-	CSEP1.5
PQ2.5, PGQ2.5	SQ2.5, SGQ2.5	-	-	CSP2.5
PQ4, PGQ4	SQ4, SGQ4	-	-	CSP4
PQ6, PGQ6	SQ6, SGQ6	-	-	CSP6
PQ10	SQ10, SGQ10	-	-	CSP10
-	SQ16	-	-	CSP16
PQ2.5-3T, PGQ2.5-3T	-	-	-	CP2.5-3T
PQ2.5-2T, PGQ2.5-2T	SQ2.5-2T, SQ2.5-2T+IS, SGQ2.5-2T	-	-	CSP2.5-2T
-	SQ2.5-3T, SGQ2.5-3T	-	-	CSP2.5-3T
PQ4-2T, PQF4-2T	-	-	-	CP4-2T
-	SQ4-2T, SGQ4-2T	-	-	CSP4-2T
PQ2.5-1X2, PGQ2.5-1X2, PQK2.5	SQ2.5-1X2, SGQ2.5-1X2, SQK2.5	-	-	CSP2.5-1X2
PQ2.5-2X2, PGQ2.5-2X2, PQK2.5-1X2,	SQ2.5-2X2, SGQ2.5-2X2, SQK2.5-1X2	-	-	CSP2.5-2X2
-	SQ4-1X2, SGQ4-1X2	-	-	CSP4-1X2
-	SQ4-2X2, SGQ4-2X2	-	-	CSP4-2X2
-	SQ6-1X2, SGQ6-1X2	-	-	CSP6-1X2
-	SQ10-1X2, SGQ10-1X2	-	-	CSP10-1X2
-	SQ16-1X2, SGQ16-1X2	-	-	CSP16-1X2
PQ4-1X2, PGQ4-1X2	-	-	-	CP4-1X2
PQ4-2X2, PGQ4-2X2	-	-	-	CP4-2X2
PQ6-1X2, PGQ6-1X2	-	-	-	CP6-1X2
PQ6-2X2	-	-	-	CP6-2X2
PGQ10	-	-	-	CP10
PQ16	-	-	-	CP16
PQD6	-	-	-	CSPD6
PQK4, PQF4	-	-	-	CPFK4
PQK2.5-2X2	SQK2.5-2X2	-	-	CSK2.5-2X2
-	SQM2.5	-	-	CSPM2.5
-	SQP2.5, SQP2.5P4	TQ2.5, TQ4, TQ6, TQ10, TGQ2.5,	-	CPP2.5
-	-	TGQ4, TGQ6, TGQ10, TQK2.5	-	CTP2.5-10
-	-	TQ2.5-2T, TGQ2.5-2T, TGQ4-2T, TQ4-2T	-	CTP2.5_4-2T
-	-	TQ2.5-2T	-	CTP2.5-2T
-	-	TQ2.5-3T, TGQ2.5-3T	-	CTP2.5-3T
-	-	TQ2.5-2T+E, TQ2.5-2T+WOE,	-	TEP2.5-2T+E
-	-	TQ2.5-2T+WOE+IS	-	TEP2.5-3T+E
-	-	TQ2.5-3T+E, TQ2.5-3T+WOE	-	CTP2.5-1X2
-	-	TQKFT2.5-1X2, TQK2.5-1X2, TQKFT4-1X2	-	

Accessories

END PLATES				
ARA	AURIGA	AQUILA	TC SERIES	TYPE
-	-	TQKFT2.5-2X2, TQK2.5-2X2, TQKFT4-2X2	-	CTP2.5-2X2
-	-	-	TC2.5,TGC2.5	CCTP2.5
-	-	-	TC4, TC6, TC10 TGC4,TGC6, TGC10	CCTP4/10
-	SQTP2.5, SQTP2.5WPM, SQTP2.5P4, SQTP2.5P4WPM	-	-	SQTPCP
-	SQECD	-	-	SQECDCP
-	SQECDD	-	-	SQECDDCP
-	-	ONTM3-6C, ONTM4-10C, ONTM5-16C	-	ONTEP

INTER CONNECTING ACCESSORIES				
ARA	AURIGA	AQUILA	TC SERIES	TYPE
PQ1.5, PGQ1.5	-	-	-	SLPU.3.5
PQ2.5 , PQ2.5-2T, PQ2.5-1X2,Q2.5-2X2, PGQ2.5, PQK2.5, PQK2.5-1X2, PQK2.5-2X2, PGQ2.5, PGQ2.5-2T, PGQ2.5-1X2, PQ2.5-3T, PGQ2.5-3T	SQ2.5 , SQ2.5-2T, SQ2.5-1X2, SQ2.5-2X2, SGQ2.5, SGQ2.5-1X2 SGQ2.5-2X2, SQK2.5, SQK2.5-2X2 SQM2.5, SQ2.5-2T+IS, SQ2.5-3T, SGQ2.5-3T, SQK2.5-1X2	TQ2.5 , TQ2.5-2T, TQKFT2.5-1X2, TQKFT2.5-1X2, TGQ2.5, TQK2.5, TQK2.5-1X2, TQK2.5-2X2, TGQ2.5-2T, TGQ2.5-1X2, TGQ2.5-2X2	TC2.5, TGC2.5	SLPU5
PQ4, PGQ4, PQK4, PQF4, PQ4-1X2, PQ4-2X2, PGQ4-1X2, PGQ4-2X2, PQ4-2T, PQF4-2T	SQ4, SQ4-2T, SQ4-1X2, SQ4-2X2, SGQ4, SGQ4-1X2, SGQ4-2X2, SQK4 SQF4, SGQ4-2T, SQF4-LED	Tq4, TQ2.5-2T+E, TQ2.5-2T+WOE, TQ2.5-2T+WOE+IS, TQ2.5-3T, TQ2.5-3T+E, TQ2.5-3T+WOE, TGQ4, TQK4, TQF4, TQ4-2T, TQKFT4-1X2, TQKFT4-2X2, TGQ4-2T, TQK4-2T, TQK4-2T+E, TQK4-1X2, TQK4-2X2, TQF4-LED, TQF4-2T, TQF4-2T-LED, TQF4-2T+E	TC4, TGC4	SLPU6
PQ6, PGQ6, PQ6-1X2, PGQ4-1X2, PGQ6-1X2, PQD6, PQ6-2X2	SQ6, SGQ6, SQ6-1X2, SGQ6-1X2	-	-	SLPU8
PQ10, PGQ10	SQ10, SGQ10, SQ10-1X2, SGQ10-1X2	-	-	SLPU10
PQ16	SQ16, SGQ16, SQ16-1X2, SGQ16-1X2	-	-	SLPU12
-	SQP2.5, SQP2.5P4	-	-	SLFP2.5
-	-	TQ6, TGQ6, TQK6, TQF6,TQF6-LED	TC6, TGC6	MLPU8
-	-	TQ10, TGQ10, TQC16, TGQC16	TC10, TGC10	MLPU10
-	-	TQC25	-	CCLA25
-	-	ONTM3-6C	-	CCLAONT9
-	-	ONTM4-10C, ONTM5-16C	-	CCLAONT13

ACCESSORIES

BARRIER PLATES & PROTECTIVE COVERS					
ARA	AURIGA	AQUILA	TC SERIES	BARRIER PLATES	PROTECTIVE COVERS
PQ1.5, PQ2.5, PQ4, PGQ1.5, PGQ2.5, PGQ4, PQK4	SQ2.5, SQ4, SGQ2.5, SGQ4, SQK4,	-	-	DBF1	PCPDBF1 (300MM)
PQ6, PQ10, PQ2.5-2T, PQ2.5-1X2, PQ2.5-2X2, PGQ6, PQK2.5, PGQ10, PGQ2.5-2T, PGQ2.5-1X2, PGQ2.5-2X2, PQ4-1X2, PQK2.5-1X2	SQ6, SQ10, SQ2.5-2T, SQ2.5-1X2, SGQ6, SGQ10, SGQ2.5-1X2, SGQ2.5-2X2, SQK2.5, SQ6-1X2, SGQ16, SGQ4-2X2, SGQ6-1X2, SQ4-2T, SGQ4-2T, SQ2.5-2X2, SQK2.5-1X2	TQ2.5, TQ4, TQ6, TQ10, TQKFT2.5-1X2, TQK2.5, TQ4, TQ6, TQ10, TQK2.5, TQK4, TQK2.5-1X2, TQK4, TQK6, TQKFT4-1X2, TQK2.5-1X2, TQK4-1X2	-	DBF3	PCPDBF3 (300MM)
PQ16, PQK2.5-2X2, PQ4-2T, PQ6-1X2, PQ6-2X2	SQ16, SQ4-2T, SQ4-2X2, SGQ4-2X2, SQK2.5-2X2, SQ6-1X2, SGQ16, SGQ6-1X2, SQ4-2T, SQK2.5-2X2, SGQ4-2T	TQKFT4-2X2, TQK4-2X2	-	DBF5	PCPDBF5 (300MM)
PQF4, PQF4-LED, PQF4-2T, PQF4-2T-LED	SQ4-1X2, SGQ4-1X2, SQF4, SQF4-LED	TQ2.5-2T+E, TQKFT2.5-2x2, TQK2.5-2X2, TQF4, TQ2.5-2T+WOE, TQ4-2T, TQK2.5-2T, TQK4-2T, TQF6, TQF6-LED, TQC16, TQC25	-	DBF6	PCPDBF6 (300MM)
PQD6, PQ2.5-3T, PGQ2.5-3T	SQ10-1X2, SGQ10-1X2, SQ2.5-3T	TQ2.5-2T	-	BPN70	PCP120
-	-	TQ2.5-3T+E, TQ2.5-3T, TQ2.5-3T+WOE, TQK2.5-3T, TQK4-2T	-	BPN120	PCP120, PCP500
-	SQ16-1X2, SGQ16-1X2	-	-	BPA185/240	PCP250
-	SQP2.5, SQP2.5P4	-	-	SPP2.5	-
-	-	-	TC2.5, TC4, TC6, TC10, TGC2.5, TGC4, TGC6, TGC10	KNBF2.5/10	PCK3



Converging
Innovations  Expanding
Solutions



**Solutions For
Connectivity**




**Solutions For
Solar Photovoltaic**



**Solutions For
Metering & Protection**



**Solutions For
Control & Instrumentation**



**Solutions For
Railways**



**Solutions For
Oil & Gas Industry**



Elmex Controls Pvt. Ltd. | Elmex Electric Pvt. Ltd.

12, GIDC Estate, Makarpura, Vadodara -390010, Gujarat, India

☎ 0265-2642021 / 23

✉ marketing@elmex.net

🌐 www.elmex.net



Scan for Website

'elmex' New Product February 2023

 ElmexControls

 ElmexControls

 ElmexControls

 ElmexControls

 ElmexControls



TECHNICAL SPECIFICATIONS MAY CHANGE IN LINE WITH TECHNICAL ADVANCES AND INDUSTRY STANDARDS.